



WSB

High-Temperature Wire Stripper Station

This Plug & Play Guide corresponds to the following references:

Ref.

WSB-9B (100 V)
WSB-1B (120 V)
WSB-2B (230 V)

Station

More Information at the
product web page



Packing List

The following items are included according purchased station reference:



WS
High-Temperature Wire Stripper
Control Unit 1 unit
 Ref. WS-9UA (100 V)
 Ref. WS-1UA (120 V)
 Ref. WS-2UA (230 V)

WSBT
Stand for WS440 1 unit
 Ref. WSBT-B


WS440
High-Temperature Wire Stripper
Tweezers 1 unit
 Ref. WS440-B



SCH
Cartridge Holder 1 unit
 Ref. SCH-A

PLR195
Cartridge Extractor Pliers 1 unit
 Ref. PLR195

Installation

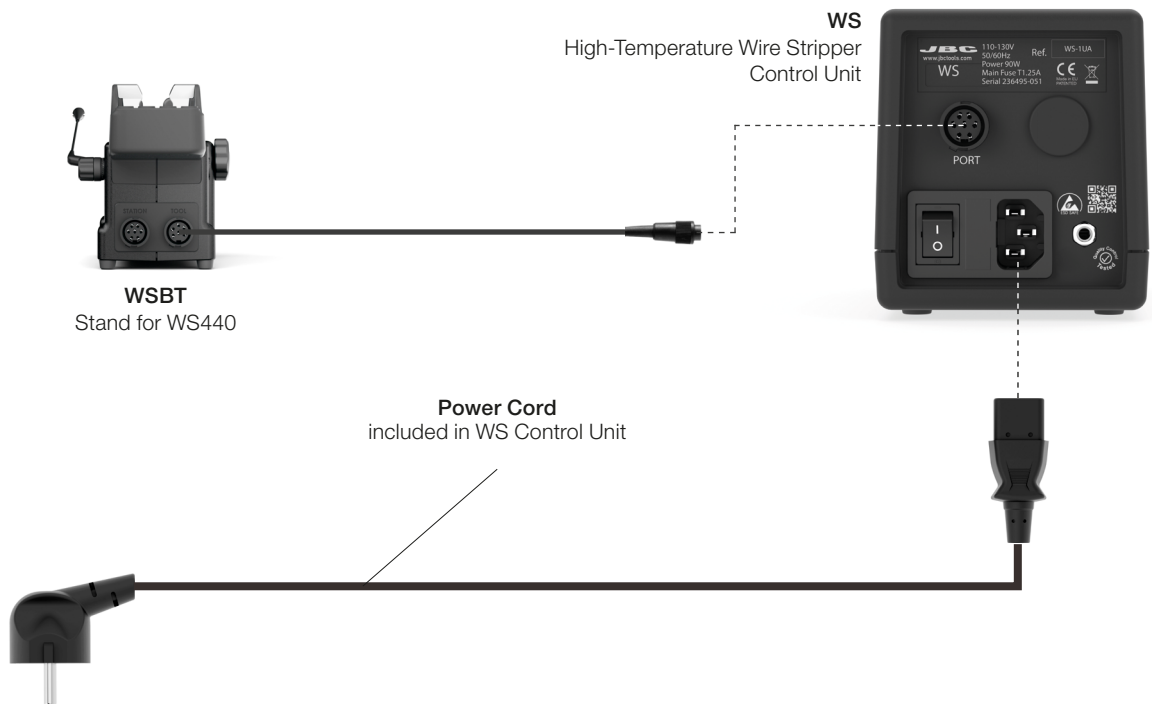

Installation



WS
High-Temperature
Wire Stripper Control Unit

WSBT
Stand for WS440



W440
Cartridge Range
(not included)



WS440
High-Temperature
Wire Stripper Tweezers

Specifications

WSB

High-Temperature Wire Stripper Station

Ref.: **WSB-9B** 100 V 50/60 Hz. Input Fuse: T1.6A. 5x20 mm Output: 15 V

Ref.: **WSB-1B** 120 V 50/60 Hz. Input Fuse: T1.25A. 5x20 mm Output: 15 V.

Ref.: **WSB-2B** 230 V 50/60 Hz. Input Fuse: T0.63A. 5x20 mm Output: 15 V.

- Package Dimensions / Weight: 387 x 352 x 190 mm / 5.48 kg
(L x H x W) 15.24 x 13.86 x 7.48 in / 12.08 lb

Complies with CE standards.
ESD safe.

JBC

Warranty

Get 2 year JBC warranty by registering here:
<https://www.jbctools.com/productregistration/>
within 30 days of purchase.



This product should not be thrown in the garbage.

In accordance with the European directive 2012/19/EU, electronic equipment at the end of its life must be collected and returned to an authorized recycling facility.