



DDCT

2-Tool Soldering Pot Station

This Plug & Play Guide corresponds to the following references:

Ref.

DDCT-9A (100 V)
DDCT-1A (120 V)
DDCT-2A (230 V)

Station

More Information at the
product web page




Video Guide

Watch the
product video



Packing List

The following items are included according to purchased station reference:



DDE
2-Tool Control Unit 1 unit
 Ref. DDE-9C (100 V)
 Ref. DDE-1D (120 V)
 Ref. DDE-2D (230 V)

CTS
Solder Pot Stand 1 unit
 Ref. CT-SA



CHB
Converter 1 unit
 Ref. CHB-B

T245
General Purpose Handle 1 unit
 Ref. T245-A


C245SP01
Solder Pot Cartridge 18 X 15 1 unit
 Ref. C245-SP01

Installation


DDE
 2-Tool Control Unit



*Power Cord
 (Included in DDE
 2-Tool Control Unit)*

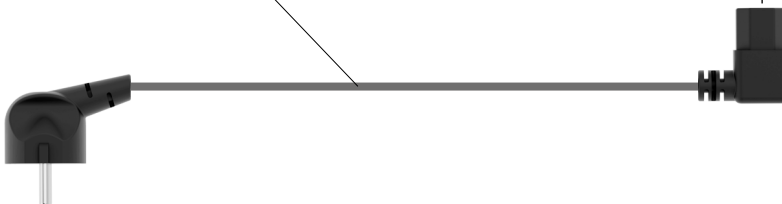

Installation

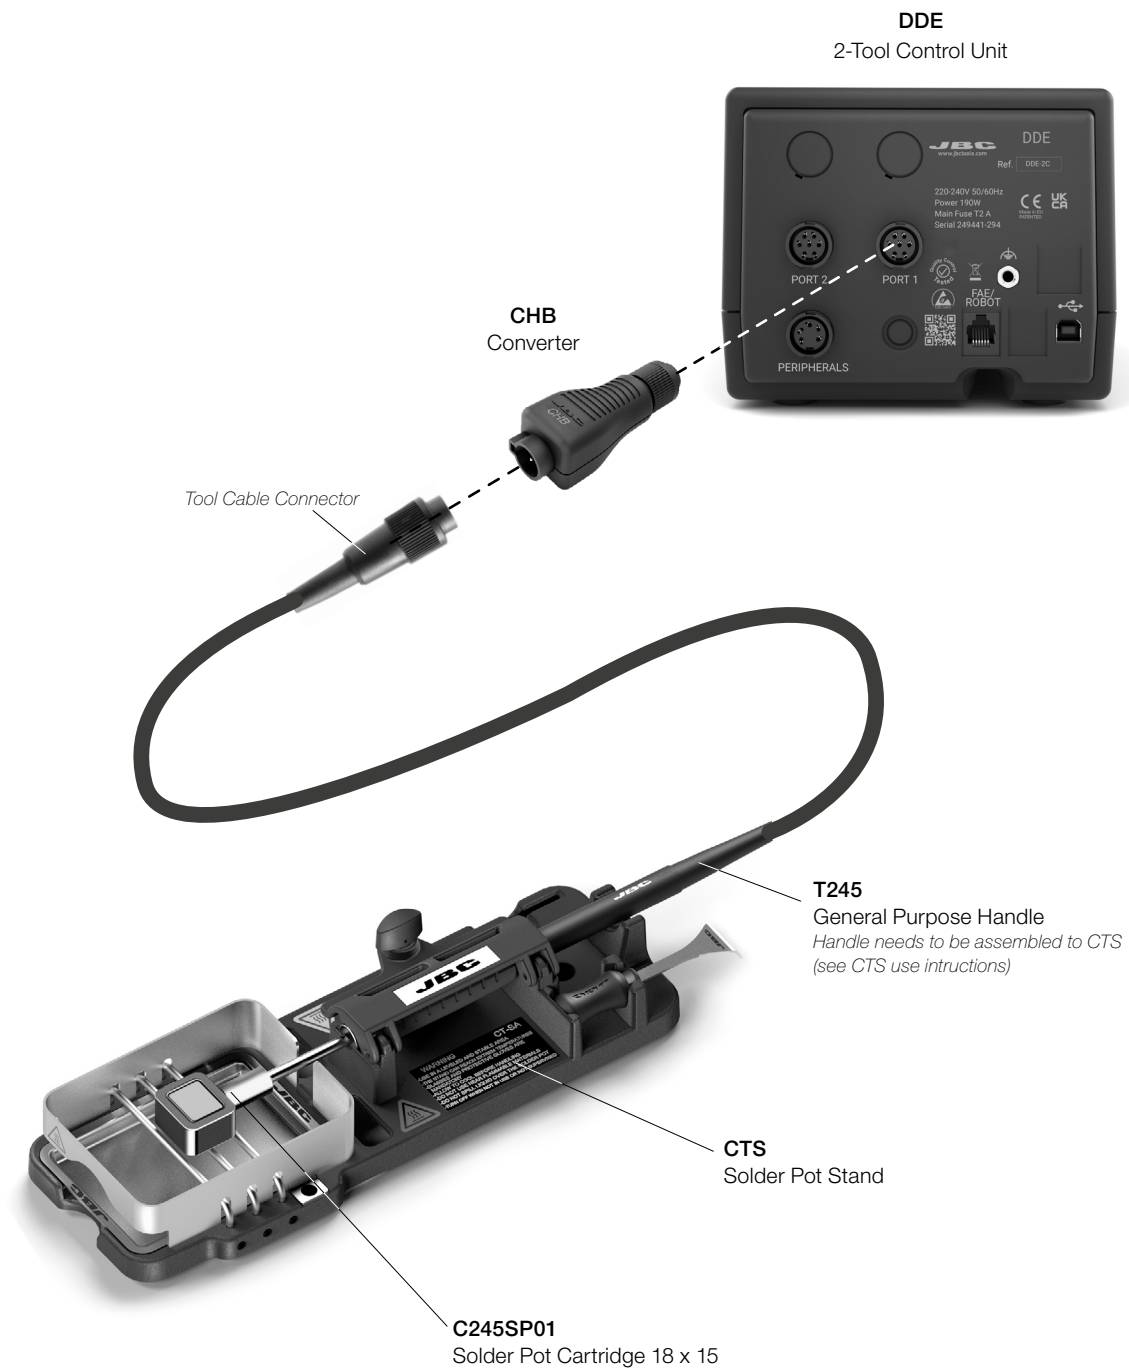

Specifications

DDCT

Heavy Duty Soldering Pot Station

Ref. **DDCT-9A** (100 V)

Ref. **DDCT-1A** (120 V)

Ref. **DDCT-2A** (230 V)

- Package Dimensions / Weight: 450 x 345 x 243 mm / 5.93 kg
(L x H x W) 17.72 x 13.58 x 9.57 in / 13.07 lb

Complies with CE standards.
ESD safe.

JBC

Warranty

Get 2 year JBC warranty by registering here:
<https://www.jbctools.com/productregistration/>
within 30 days of purchase.



This product should not be thrown in the garbage.

In accordance with the European directive 2012/19/EU, electronic equipment at the end of its life must be collected and returned to an authorized recycling facility.

www.jbctools.com

0033896-270524